

DB-CO | D-SetCO



i GS818

A 95 mm

B 95 mm

C 25 mm

D 96 mm

E 146 mm

F 53 mm

 NO: 10A | NC: 5A
NO: 250V AC / 28V DC
NC: 250V AC

 345 g

 Type A (with D-CO, CO-M)


 10 y

 -10 ... 45 °C

 25 ... 95 RH%

 ~230VAC, 40 mA
50 Hz, 0.8W

 ≥85 dB@3m

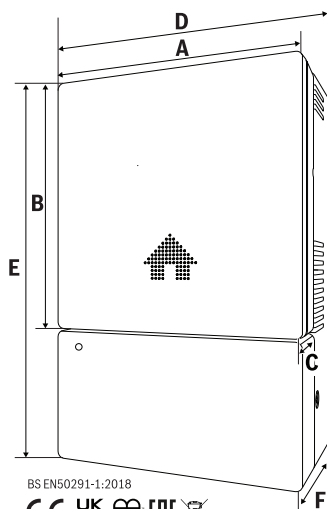


BS EN50291-1:2018


CE UKCA


EAC

KIM16830

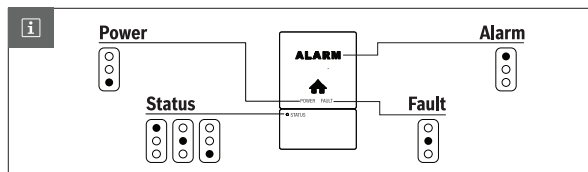


0010043184-002

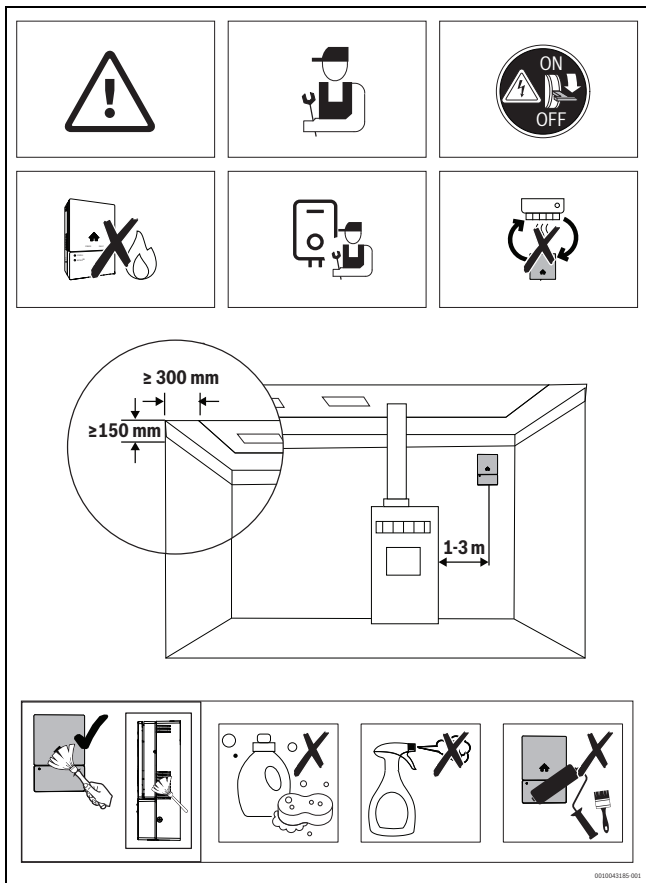


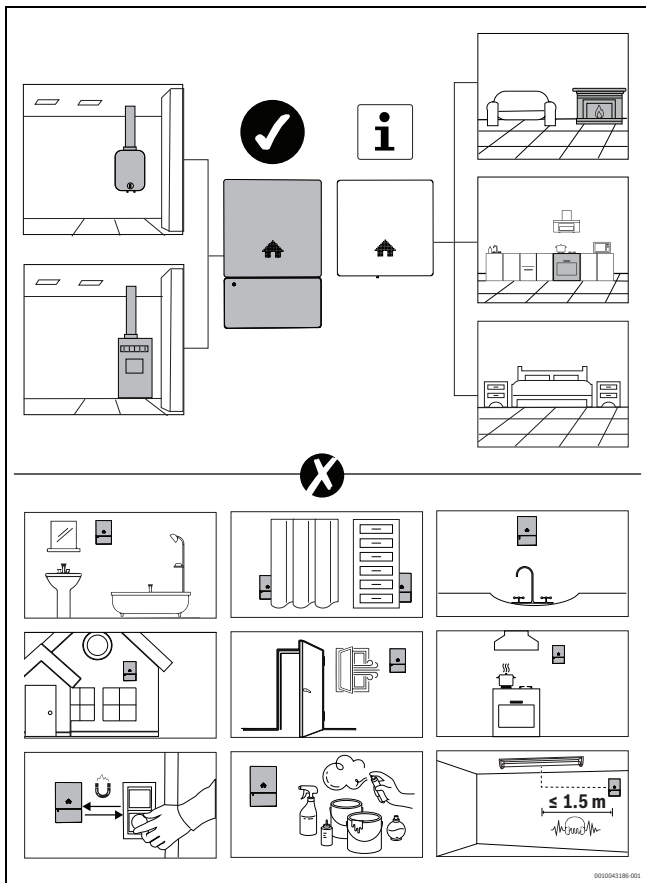


0010043186-001

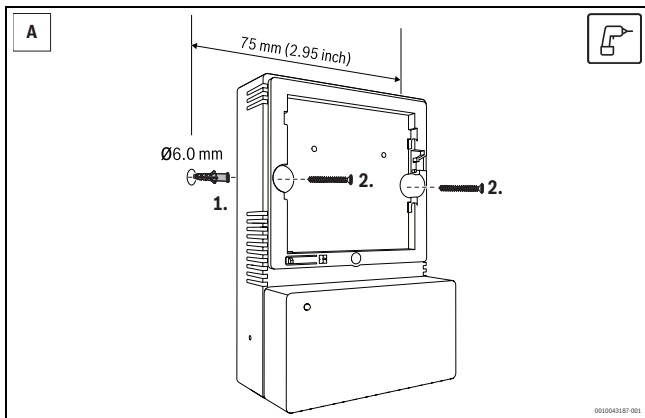


4

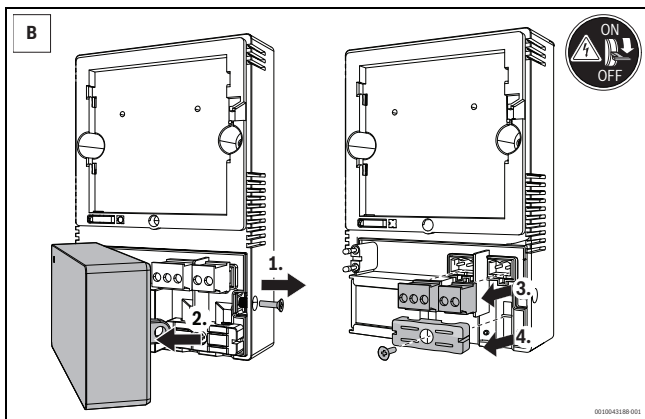


5

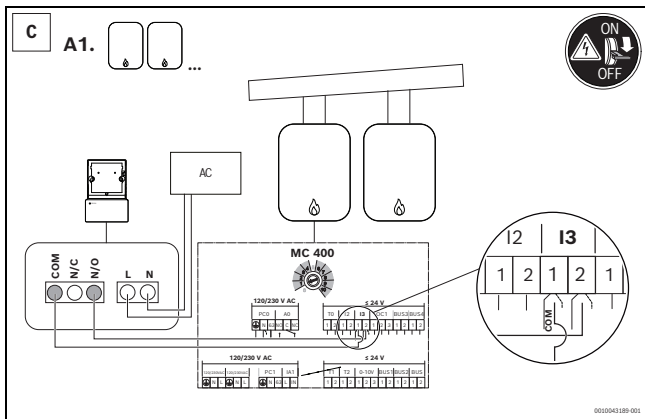


6

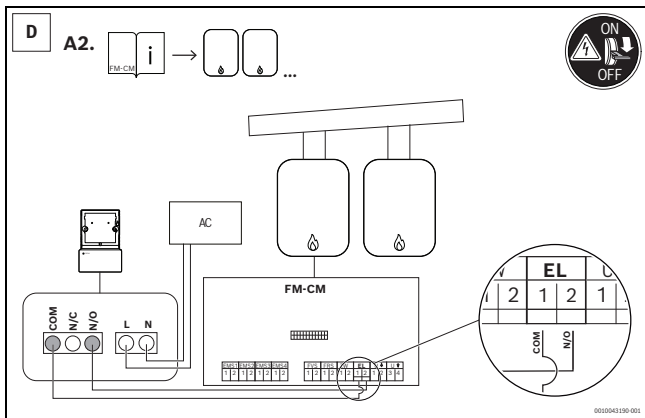


7

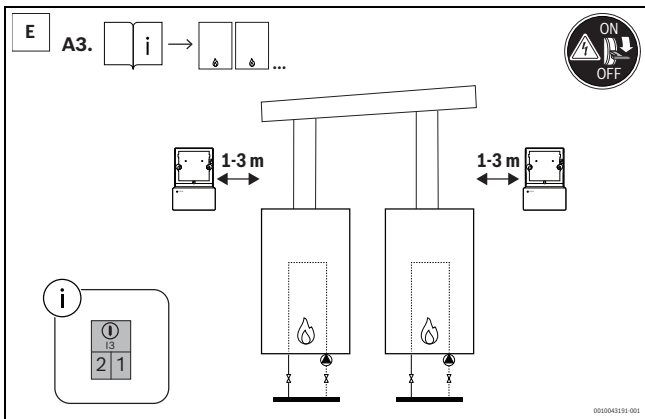


8

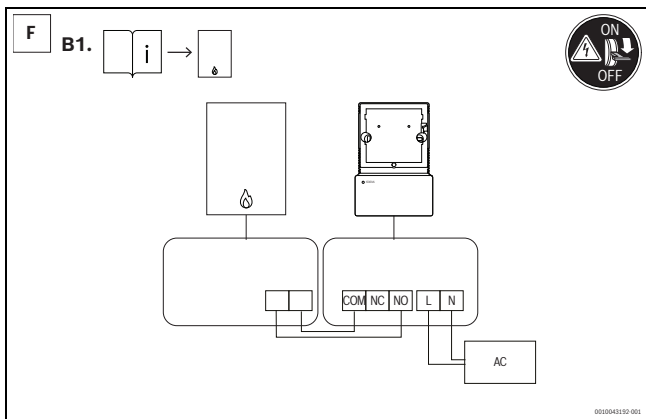


9

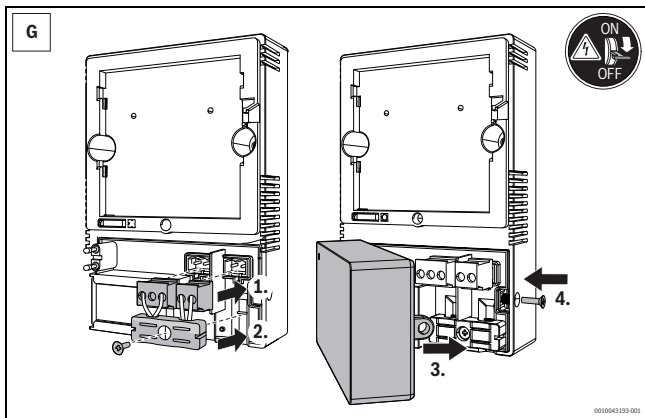


10

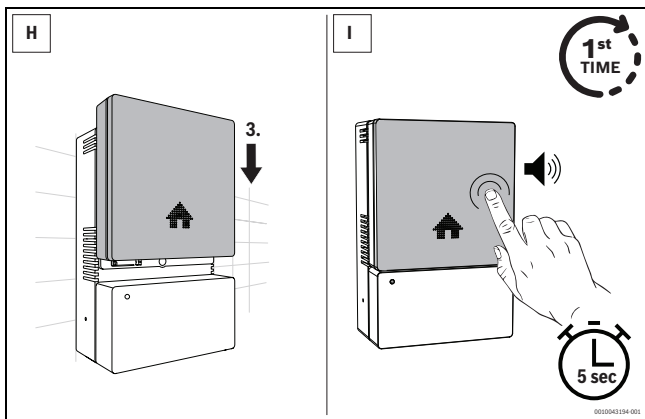


11

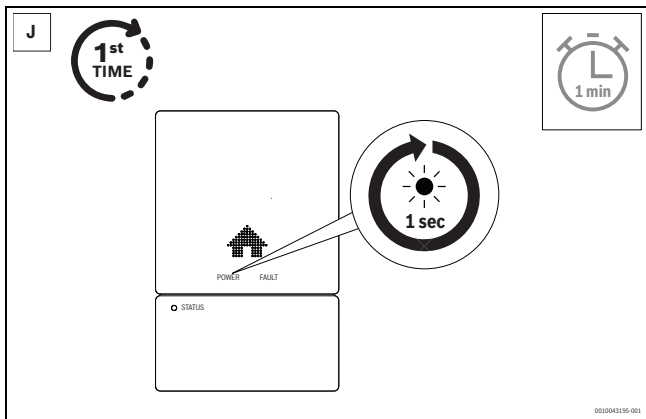


12

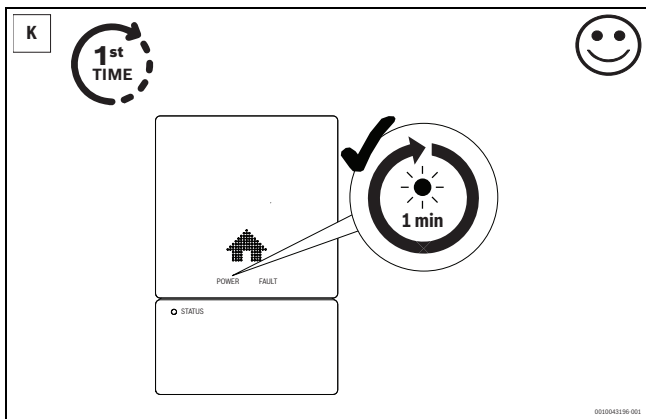


13

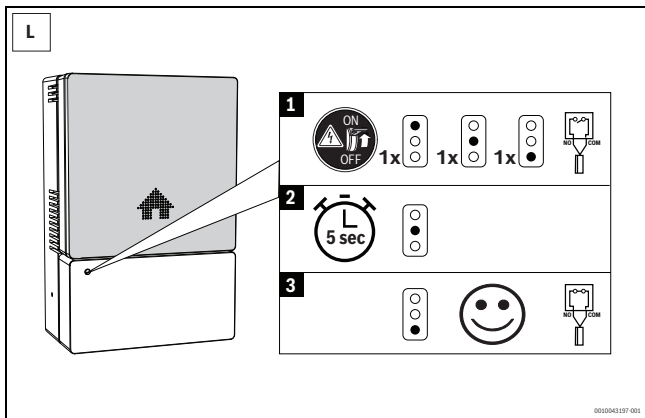


14

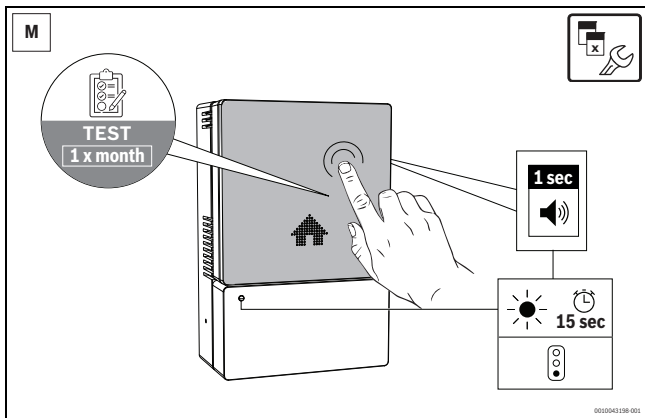


15

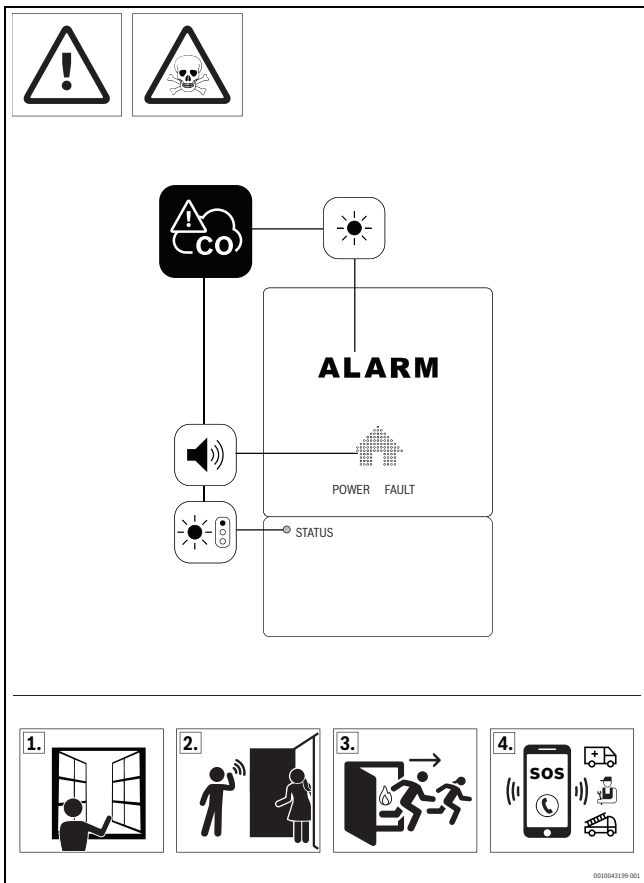


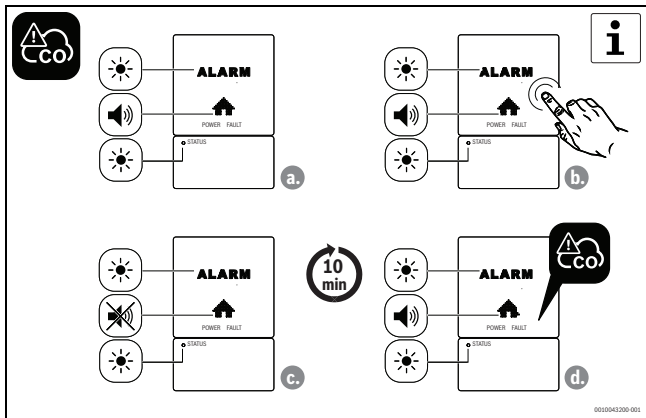


17

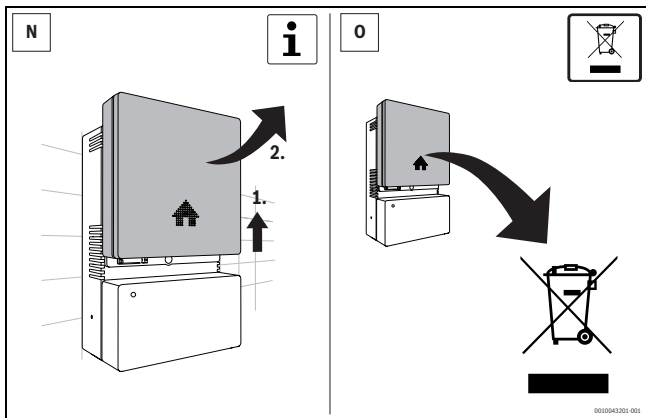


18

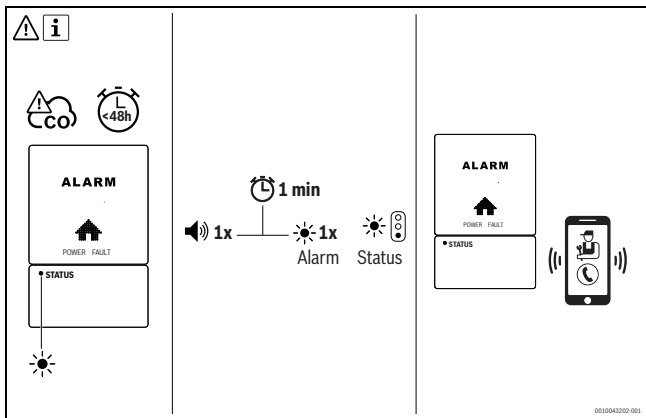

19

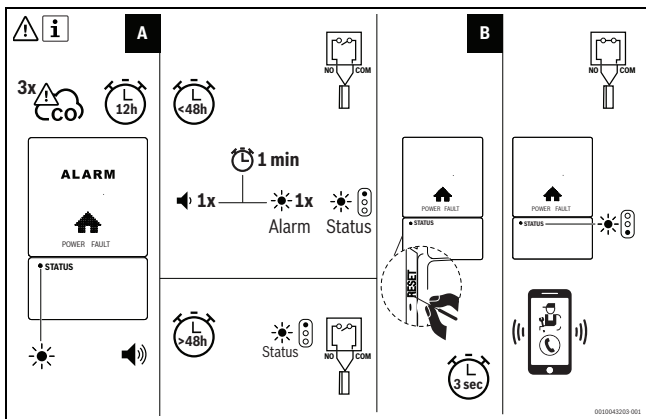

20

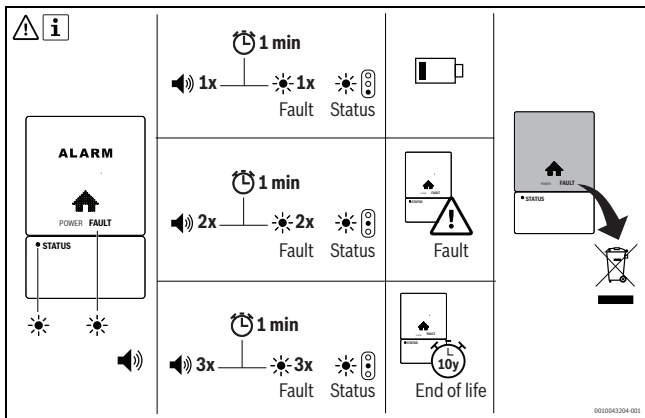



Original Quality by
Bosch Thermotechnik GmbH
Sophienstraße 30-32
D-35576 Wetzlar/Germany

Importer

Bosch Thermotechnology Ltd.
Cotswold Way, Warndon
Worcester WR4 9SW
United Kingdom